

Elite Series

LPS3802ATMP-T1S

8-Port Outdoor Gigabit Managed PoE Switch, 802.3bt



The LinkPower™ LPS3802ATMP-T1S is a Layer 2+ 10-Port Gigabit Managed Outdoor 802.3bt PoE switch designed for industrial and commercial applications. It features 8 Gigabit PoE++ (802.3bt) ports and 2 SFP uplink ports, delivering up to 90W per port with a total power budget of 400W—ideal for high-performance devices such as IP cameras and wireless access points.

Housed in an IP68-rated weatherproof enclosure, it withstands harsh outdoor conditions, with IP66 (hinged cover) or IP68 (screw-locked) protection. Dual power input (120–240V AC and 48V DC) ensures reliable operation, while fiber uplinks support long-distance transmission up to 120 km.

Designed for demanding environments, it operates from -30°C to +70°C and includes 6KV surge protection. Advanced Layer 2+ features such as VLAN, Link Aggregation, SNMP, and QoS enable efficient network management.

By integrating PoE, the LPS3802ATMP-T1S simplifies installation and reduces costs, making it a reliable solution for outdoor surveillance, wireless, and industrial networks.

Key Product Features

- 8x 10/100/1000Mbps RJ45 PoE++ ports supporting IEEE 802.3bt Type 3/4 (up to 95W per port)
- 2x Gigabit SFP fiber uplink ports for high-bandwidth, long-distance transmission
- Up to 95W per port with support for 60W and 95W output levels
- Dual power input redundancy (120–240V AC and/or 48V DC)
- Layer 2 management features including VLAN (Port-based, IEEE 802.1Q, GVRP), Dynamic VLAN, and QoS
- SNMP v1/v2c/v3 and RMON support for network monitoring and management
- Security features including 802.1x, RADIUS, TACACS+, HTTPS, SSH, IP & MAC binding, and port security
- Compliant with IEEE standards: 802.3, 802.3u, 802.3z, 802.3ab, 802.3x, 802.1D, 802.1Q, 802.1p, 802.1x, 802.1W, SNMP, IGMP
- 12Gbps non-blocking bandwidth, 8K MAC address table
- Auto MDI/MDIX on all ports
- IEEE 802.3x flow control and back pressure support
- 6KV Ethernet surge protection for harsh outdoor environments
- Operating temperature: -30°C to +70°C (full load)
- Event and fault management with email alerts and relay output

Technical Specifications

Model Description	Outdoor 10-Port Layer 2+ Gigabit Managed 802.3bt PoE Switch
Model Name	LPS3802ATMP-T1S
Port Interface	8* Gigabit 802.3bt PoE ports (Data/ Power), 2* Gigabit uplink SFP fiber ports (Data)
Console Port	1*Console RS232 port (115200,N,8,1)
Forwarding Mode	Store and Forward (Full Wire Speed)
Network Media	10BASE-T: UTP Cat 3, 4, 5 (≤100 Meters), 100BASE-TX: UTP Cat 5/5e/6 (≤100 Meters), 1000BASE-TX: UTP Cat 5/5e/6 (≤100 Meters)
Performance Specification	Bandwidth: 12Gbps (non-blocking) Network Latency (100 to 1000 Mbps): maximum delay less than 50 microseconds Packet forwarding rate: 8.93Mbps@64bytes MAC address table: 8K MTBF: 539608 hours Support protection for over-current, over-voltage and reverse connection
Network Protocols and PoE Standards	IEEE 802.3 10BASE-T, IEEE 802.3i 10Base-T, IEEE 802.3u 100Base-TX, IEEE 802.3ab 1000Base-T, IEEE 802.3z 1000Base-X, IEEE 802.3x, IEEE 802.3bt Type 3 60W & Type 4 95W
LED Indicator	Running Light: SYS, Interface Light: LINK, PoE
Power Supply	AC Input voltage: 120V ~ 240V AC DC Input voltage: 48V~57V Power Connector: 3-Pin AC & 4-Pin DC industrial terminal block System Power: 400W Surge Protection: 6kV TP Port Surge Protection: 4.5kV
Enclosure Dimension	LxWxH: (12 x 10 x 4 inch, 304.8 x 250.4 x 101.6 mm)
Working Environment	Working Temperature: -30~70 Storage Temperature: -40~85 Relative Humidity: 5%~95%, non-condensing Storage Humidity: 10%~95%, non-condensing Working Height: 3000M above sea level (10,000ft) Storage Height: 3000M above sea level (10,000ft)
Radiation	CE mark, commercial FCC Part 15 Class B
Certification	CE Mark, Commercial CE/LVD FCC, RoHS, C-TICK, UL
Warranty	3 Years

Software Specifications

Layer 2+ Switching	
Spanning Tree Protocol (STP)	Standard Spanning Tree 802.1d Rapid Spanning Tree (RSTP) 802.1w
G.8032 ERPS	<50ms ring protection for industrial high reliable application
Aggregation	Link Aggregation Control Protocol (LACP) IEEE 802.3ad; Up to 7 groups ; Up to 14 ports per group
VLAN	Support up to 4K VLANs simultaneously (out of 4096 VLAN IDs) ; Port-based VLAN; 802.1Q tag-based VLAN, GVRP, Dynamic VLAN MAC Address Authentication
IGMP v1/v2 snooping	IGMP limits bandwidth-intensive multicast traffic to only the requesters; supports 1024 multicast groups (source-specific multicasting is not supported)
Security	
Secure Shell (SSH) Protocol	SSH secures Telnet traffic in and out the switch, SSH v1 and v2 are supported
Secure Sockets Layer (SSL), HTTPS	SSL encrypts the http traffic, allowing advance secure access to the browser-based management GUI in the switch
Port Security	Locks MAC Addresses to ports, and limits the number of learned MAC addresses
DHCP Snooping	prevent unauthorized configuration and use of IP addresses, while providing support for IP Source Guard and ARP detection
IP Source Guard	Prevents datagram with spoofed addresses from being in the network
ARP Inspection	Prevent ARP spoofing attacks and ARP
Storm control	Prevents traffic on a LAN from being disrupted by a broadcast, multicast, or unicast storm on a port
ACLs	Support for up to 256 entries; Drop or rate limitation based on source and destination MAC, VLAN ID or IP address, protocol, port, differentiated services code point (DSCP) / IP precedence, TCP/ UDP source and destination ports, 802.1p priority, Ethernet type, Internet Control Message Protocol (ICMP) packets, IGMP packets, TCP flag
Quality of Service	
Hardware	Support 8 hardware queues
Scheduling	8 COS (Class of Service) queues per port support strict priority and weighted round-robin (WRR)
Classification	Port based; 802.1p (PCP) VLAN priority based;
Rate Limiting	Ingress policer; egress shaping and rate control; per VLAN, per port and flow based
Management (Web/ SSL, Telnet/ SSH, ping, Trivial File Transfer Protocol (TFTP), SNMP, Syslog)	
Web GUI interface	Built-in switch configuration utility for browser-based device configuration (HTTP/HTTPS). Supports configuration, system dashboard, maintenance, and monitoring
Dual Image	Dual image provides independent primary and secondary OS files for backup while upgrading
Firmware upgrade	Web browser upgrade (HTTP/ HTTPS) and TFTP; Upgrade through console port as well
Port mirroring	Traffic on a port can be mirrored to another port for analysis with a network analyzer or RMON probe. Up to N-1 (N is Switch's Ports) ports can be mirrored to single destination port. A single session is supported.
Other management	Single IP management; HTTP/HTTPS; SSH; RADIUS; TACACS+, DHCP Client; SNTP; cable diagnostics; ping; syslog; Telnet client (SSH secure support)

System Configuration

LinkPower™ LPS3802ATMP-T1S



Accessories

Standard Accessories

PFCK0001-3
Power & Fiber Connector Kit



ECK0001-4
Ethernet Connector Kit



WMK0001
Wall Mounting Kit



APCK0001
AC Power Cable Kit



Optional Accessories


MMK0001-S
Mast Mounting Kit
(Pole Diameter from 2" to 4.5")



Pole Mount View




Enclosure Drawings & Interfaces

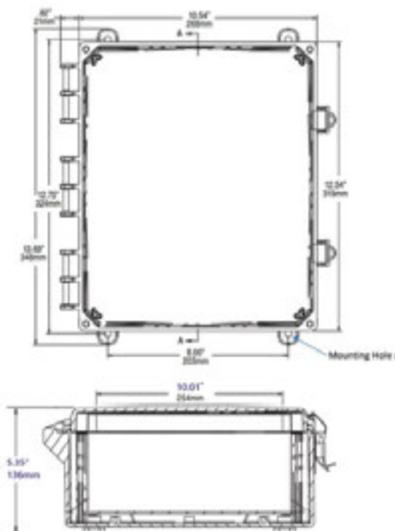

Interfaces

1. Weatherproof PoE Connector (1~4)
2. Weatherproof SFP Cable Connector (1~2)
3. Weatherproof AC / DC Power Cable Connector
4. Vent Plug

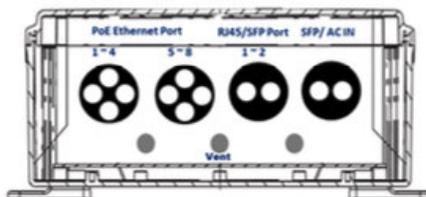


To Use Conduit Connectors, the diameter of the holes is 1.0 inch.



Internal Hotel Space: 10"x5"x4" (LxWxH) for Wiring Storage

Electrical Pin Out Diagram

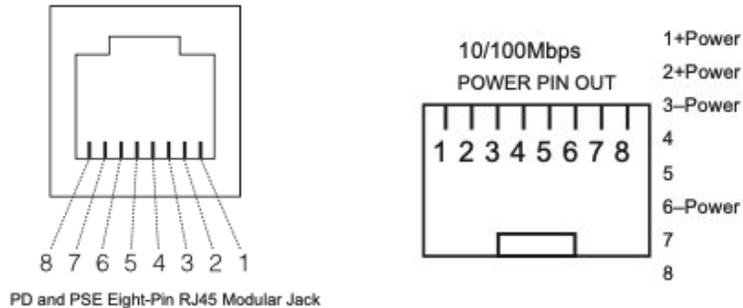

Package Contents

1. LinkPower LPS3802ATMP-T1S PoE Switch
2. User's Manual
3. Quick Install Guide
4. Warranty Information
5. APCK0001 AC Power Cable Kit
6. PFCK0001-3 Power & Fiber Connector Kit
7. ECK0001-4 Ethernet Connector Kit
8. WMK0001 Wall Mount Kit with 4 Flanges
9. MMK0001-L Pole Mount Kit (Optional)